

# Fitting CoDa using the Logistic Gaussian distribution with Dirichlet covariance structure

Version 1.0.0

Joaquín Martínez-Minaya • jmarmin@eio.upv.es

2025-04-29 23:57:29.822144

```
### --- 0. Loading libraries --- ###  
library(INLA)  
library(dplyr)  
library(ggplot2)
```

## An introduction to the Logistic Normal Dirichlet Regression

As defined in Martínez-Minaya and Rue (2023),  $\mathbf{y} \in \mathbb{S}^D$  follows a logistic-normal distribution with Dirichlet covariance  $\mathcal{LN}\mathcal{D}(\boldsymbol{\mu}, \boldsymbol{\Sigma})$  if and only if  $alr(\mathbf{y}) \sim \mathcal{N}(\boldsymbol{\mu}, \boldsymbol{\Sigma})$ , and:

$$\begin{aligned}\Sigma_{dd} &= \sigma_d^2 + \gamma, \quad d = 1, \dots, D-1 \\ \Sigma_{dk} &= \gamma, \quad d \neq k\end{aligned}$$

where  $\sigma_d^2 + \gamma$  represents the variance of each log-ratio and  $\gamma$  is the covariance between log-ratios. From now on we will refer to  $\mathcal{LN}\mathcal{D}(\boldsymbol{\mu}, \boldsymbol{\Sigma})$  as the multivariate normal with Dirichlet covariance structure.

Let  $\mathbf{y}$  be a multivariate random variable such as  $\mathbf{y} \sim \mathcal{LN}\mathcal{D}(\boldsymbol{\mu}, \boldsymbol{\Sigma})$ , which by definition is equivalent to  $alr(\mathbf{y}) \sim \mathcal{N}(\boldsymbol{\mu}, \boldsymbol{\Sigma})$ . Because of its easy interpretability in terms of log-ratios with the reference category, we focus on modelling  $alr(\mathbf{y})$  as a  $\mathcal{N}(\boldsymbol{\mu}, \boldsymbol{\Sigma})$ .

## Simulated example I (Type II)

The model with which we are going to operate in this example presents the following structure:

$$alr(\mathbf{Y}) \sim \mathcal{N}\mathcal{D}((\boldsymbol{\mu}^{(1)}, \dots, \boldsymbol{\mu}^{(D)}), \boldsymbol{\Sigma}) \quad (1)$$

$$\boldsymbol{\mu}^{(d)} = \mathbf{X}\boldsymbol{\beta}^{(d)}, \quad (2)$$

Note that this is the second structure presented in Martínez-Minaya and Rue (2023), where we are working under the assumption that covariates have different effect in each linear predictor. In particular, we consider  $D = 3$ , and the reference category is the third one. So, we are dealing with two  $alr$ -coordinates. Also, we just generate a covariate  $x$  scaled to have mean 0 and standard deviation 1.

$$alr(\mathbf{Y}) \sim \mathcal{N}\mathcal{D}((\boldsymbol{\mu}^{(1)}, \boldsymbol{\mu}^{(2)}), \boldsymbol{\Sigma}), \quad (3)$$

$$\boldsymbol{\mu}^{(1)} = \beta_0^{(1)} + \beta_1^{(1)}\mathbf{x},$$

$$\boldsymbol{\mu}^{(2)} = \beta_0^{(2)} + \beta_1^{(2)}\mathbf{x}. \quad (4)$$

## Data simulation

```
set.seed(201803)
inla.seed = sample.int(n=1E6, size=1)
options(width=70, digits=3)
```

## Defining hyperparameters and dimensionality of the response

We start defining the hyperparameters of the likelihood:  $\sigma_1^2 = 0.5$ ,  $\sigma_2^2 = 0.4$  and  $\gamma = 0.1$ , and computing the correlation matrix of the *alr*-coordinates.

```
### --- 1. Simulation --- ###
# Parameters for the simulation
D <- 3
N <- 1000
sigma2 <- c(0.5, 0.4)
cov_param <- 0.1
sigma_diag <- sqrt(sigma2 + cov_param)
hypers_lik <- data.frame(hypers = c(sigma2, cov_param),
                        name1 = c("sigma2.1", "sigma2.2", "gamma"))
# We create the correlation parameters based on the previous idea
# We are going to have ((D-1)^2 - (D-1))/2 rhos
rho <- diag(1/sigma_diag) %*% matrix(cov_param, D-1, D-1) %*% diag(1/sigma_diag)
diag(rho) <- 1
rho

##      [,1] [,2]
## [1,] 1.000 0.183
## [2,] 0.183 1.000
```

## Simulating a covariate

We define the covariate  $\mathbf{x}$  and also, the corresponding betas, constructing the corresponding linear predictor.

```
x = runif(N)-0.5
# - mean 0 to not affect intercept
betas = matrix(c(-1, 3, -1, 5), nrow = D-1, byrow = TRUE)
X <- data.frame(1, x) %>% as.matrix(.)
lin.pred <- X %*% t(betas)
```

## alr-coordinates

We construct the *alr*-coordinates

```
### ----- 1.2.3. Constructing the likelihood --- ###
Sigma <- matrix(sigma_diag, ncol = 1) %*% matrix(sigma_diag, nrow = 1)
Sigma <- Sigma*rho

lin.pred %>%
  apply(., 1, function(z)
    MASS::mvrnorm( n = 1,
                  mu = z,
                  Sigma = Sigma)) %>%
  t(.)-> alry
```

## Data in the simplex

We move back to the Simplex using the *alr*-inverse, in particular, we use the function `alrInv` from the R-package `compositions`.

```
y.simplex <- compositions::alrInv(alry)
y.simplex <- as.numeric(t(y.simplex)) %>% matrix(., ncol = D, byrow = TRUE)
colnames(y.simplex) <- paste0("y", 1:D)
data <- data.frame(alry, y.simplex, x)
colnames(data)[1:(D-1)] <- c(paste0("alry.", 1:(D-1)))
data %>% head(.)
```

```
##  alry.1 alry.2  y1    y2    y3      x
## 1 -1.580 -1.46 0.143 0.1620 0.695  0.0265
## 2 -1.345 -3.18 0.200 0.0318 0.768 -0.3708
## 3 -1.735 -1.52 0.126 0.1567 0.717  0.0819
## 4 -1.012 -2.01 0.243 0.0898 0.667 -0.0377
## 5 -0.584 -1.53 0.314 0.1224 0.563  0.0775
## 6 -0.041  2.10 0.095 0.8060 0.099  0.3962
```

## Plotting the simulated data

```
### Alr coordinates
data %>%
  tidyr::pivot_longer(., cols = ,starts_with("alr"),
                      names_to = "y.names", values_to = "y.resp") %>%
  ggplot(data = .) +
  geom_point(aes(x = x, y = y.resp, fill = x), shape = 21, size = 2) +
  ylab("alr") +
  facet_wrap(~y.names) +
  theme_bw() +
  theme(legend.position = "bottom") -> p_alr

#pdf("simulated_data.pdf", width = 8, height = 6)
p_alr

#dev.off()
```

## Data preparation for fitting

### Index for individual

```
data$id.z <- 1:dim(data)[1]
```

### Extending the dataset

We extend the data with *alr*-coordinates for introducing in `inla.stack`

```
data_ext <- data %>%
  tidyr::pivot_longer(., cols = all_of(paste0("alry.", 1:(D-1))),
                      names_to = "y.names",
                      values_to = "y.resp") %>%
  .[order(ordered(.$y.names)),]
data_ext$y.names <- ordered(data_ext$y.names)
head(data_ext)
```



Figure 1: Simulated data using alr-coordinates in terms of x

```
## # A tibble: 6 x 7
##       y1      y2      y3      x id.z y.names y.resp
##   <dbl> <dbl> <dbl> <dbl> <int> <ord>    <dbl>
## 1 0.143  0.162  0.695  0.0265     1 alry.1  -1.58
## 2 0.200  0.0318 0.768 -0.371     2 alry.1  -1.35
## 3 0.126  0.157  0.717  0.0819     3 alry.1  -1.74
## 4 0.243  0.0898 0.667 -0.0377     4 alry.1  -1.01
## 5 0.314  0.122  0.563  0.0775     5 alry.1  -0.584
## 6 0.0950 0.806  0.0990  0.396     6 alry.1  -0.0410
```

## Response in R-INLA

We create a matrix with dimension  $(N \times (D - 1)) \times (D - 1)$  for including the multivariate response in R-INLA

```
names_y <- paste0("alry.", 1:(D-1))
1:length(names_y) %>%
  lapply(., function(i){
    data_ext %>%
      dplyr::filter(y.names == names_y[i]) -> data_comp_i
    #Response
    y_alr <- matrix(ncol = names_y %>% length(.), nrow = dim(data_comp_i)[1])
    y_alr[, i] <- data_comp_i$y.resp
  }) -> y_resp

1:length(names_y) %>%
  lapply(., function(i){
    y_aux <- data_ext %>%
      dplyr::select(y.resp, y.names) %>%
      dplyr::filter(y.names == names_y[i]) %>%
      dplyr::select(y.resp) %>%
      as.matrix(.)
    aux_vec <- rep(NA, (D-1))
    aux_vec[i] <- 1
    kronecker(aux_vec, y_aux)
  }) -> y_list

y_tot <- do.call(cbind, y_list)
y_tot %>% head(.)
```

```
##      [,1] [,2]
## [1,] -1.580  NA
## [2,] -1.345  NA
## [3,] -1.735  NA
## [4,] -1.012  NA
## [5,] -0.584  NA
## [6,] -0.041  NA
```

## Covariates in R-INLA

Covariates are going to be included in the model as random effects with big variance. So, we need the values of the covariates, and also, an index indicating to which alr-coordinate it belongs.

```
variables <- c("intercept", data %>%
  dplyr::select(starts_with("x")) %>%
  colnames())
id.names <- paste0("id.", variables)
```

```
id.variables <- rep(data_ext$y.names %>% as.factor(.) %>% as.numeric(.),
                    length(variables)) %>%
  matrix(., ncol = length(variables), byrow = FALSE)
colnames(id.variables) <- id.names
```

```
variables
```

```
## [1] "intercept" "x"
```

```
id.variables %>% head(.)
```

```
##      id.intercept id.x
## [1,]           1    1
## [2,]           1    1
## [3,]           1    1
## [4,]           1    1
## [5,]           1    1
## [6,]           1    1
```

```
inla.stack
```

We create an `inla.stack` for estimation

```
stk.est <- inla.stack(data    = list(resp = y_tot),
                     A        = list(1),
                     effects = list(cbind(data_ext %>%
                                           dplyr::select(starts_with("x")),
                                           data_ext %>%
                                           dplyr::select(starts_with("id.z")),
                                           id.variables,
                                           intercept = 1)),
                     tag      = 'est')
```

## Fitting the model

In this section, we fit a model (Type II in the manuscript), and we obtain the marginal posterior distribution of the parameters and hyperparameters

### Fit in R-INLA

```
# Have different parameters for fixed effects, and do not include spatial random effects.
list_prior <- rep(list(list(prior = "pc.prec", param = c(1, 0.01))), D-1)

### Fitting the model
formula.typeII <- resp ~ -1 +
  f(id.intercept, intercept,
    model = "iid",
    initial = log(1/1000),
    fixed = TRUE) +
  f(id.x, x,
    model = "iid",
    initial = log(1/1000),
    fixed = TRUE) +
  f(id.z,
    model = "iid",
```

```

hyper = list(prec = list(prior = "pc.prec",
                        param = c(1, 0.01))), constr = TRUE)
model.typeII <- inla(formula.typeII,
                    family      = rep("gaussian", D-1),
                    data        = inla.stack.data(stk.est),
                    control.compute = list(config = TRUE),
                    control.predictor = list(A = inla.stack.A(stk.est),
                                           compute = TRUE),
                    control.family = list_prior,
                    inla.mode = "experimental",
                    verbose = FALSE)

```

### Marginal posterior distribution of the fixed effects


```

### Posterior distribution of the fixed effects
data_fixed <- rbind(data.frame(inla.ssmarginal(model.typeII$smarginals.random$id.x$index.1),
                              alr = "alr(y1/y3)",
                              var = "x",
                              param = "beta1",
                              real = betas[1,2]),
                  data.frame(inla.ssmarginal(model.typeII$smarginals.random$id.x$index.2),
                              alr = "alr(y2/y3)",
                              var = "x",
                              param = "beta1",
                              real = betas[2,2]),
                  data.frame(inla.ssmarginal(model.typeII$smarginals.random$id.intercept$index.1),
                              alr = "alr(y1/y3)",
                              var = "intercept",
                              param = "beta0",
                              real = betas[1,1]),
                  data.frame(inla.ssmarginal(model.typeII$smarginals.random$id.intercept$index.2),
                              alr = "alr(y2/y3)",
                              var = "intercept",
                              param = "beta0",
                              real = betas[2,1]))

p_fixed <- ggplot() +
  geom_line(data = data_fixed, aes(x = x, y = y), size = 0.9) +
  #ggtitle("Effect of the covariate bio12") +
  theme_bw() +
  geom_vline(data = data_fixed, aes(xintercept = real), col = "red4") +
  # scale_color_manual(values=c("#E75F00", "#56B4E9"))+
  theme(legend.position = "bottom") +
  facet_wrap(~param + alr, ncol = D-1, scales = "free") +
  xlab(expression(beta^(d))) +
  ylab(expression(p(beta^(d) *'|'* theta))) +
  theme(legend.title = element_blank())

#pdf("posterior_fixed.pdf", width = 6, height = 5)
p_fixed

```

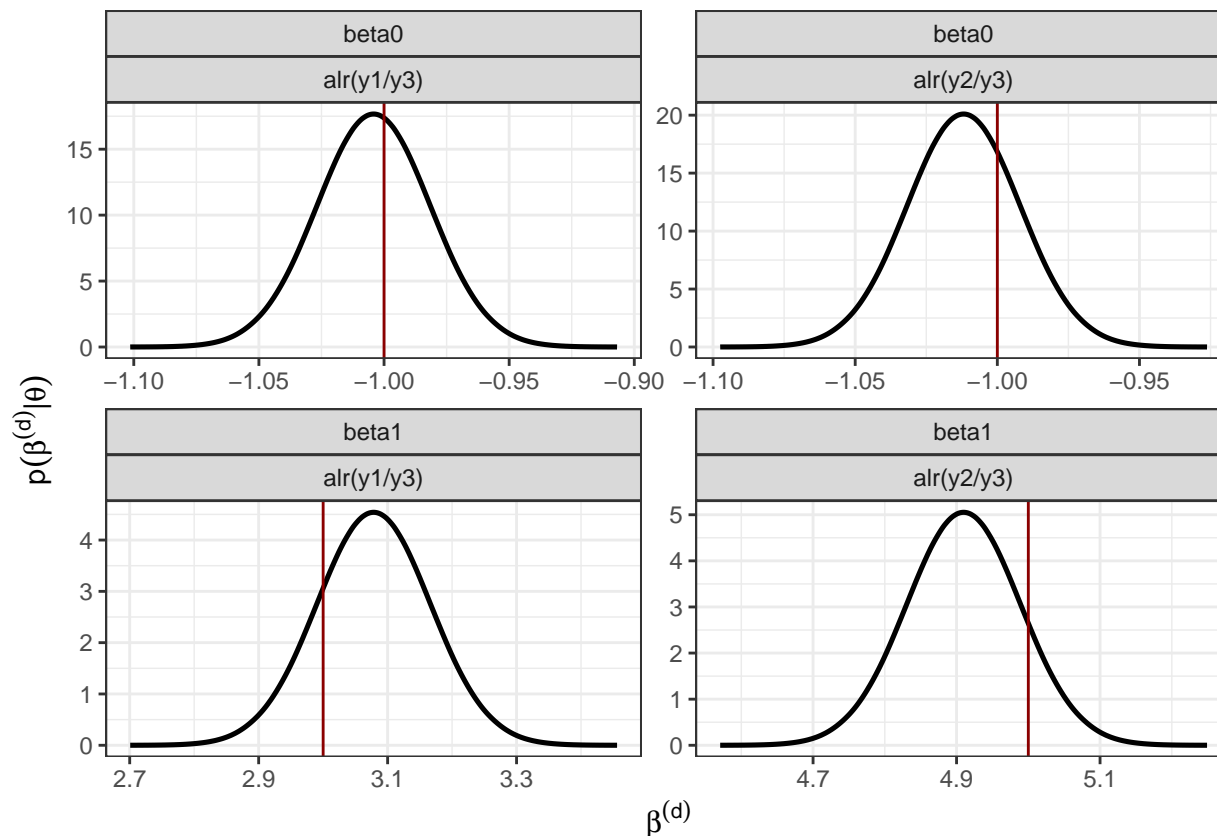

```
#dev.off()
```

## Marginal Posterior distribution of the hyperparameters

```
### Posterior distribution of the hyperparameters
prec <- list(sigma2.1 = model.typeII$marginals.hyperpar$`Precision for the Gaussian observations`,
             sigma2.2 = model.typeII$marginals.hyperpar$`Precision for the Gaussian observations[2]`,
             gamma = model.typeII$marginals.hyper$`Precision for id.z`)

hyper <- lapply(1:length(prec),
               function(x){
                 inla.smarginal(inla.tmargin(prec[[x]], fun = function(y)(1/y))) %>%
                   data.frame(.)
               })
names(hyper) <- names(prec)

hyper.df <- lapply(1:length(hyper),
                  function(x){
                    cbind(data.frame(hyper[[x]]), name1 = names(hyper)[x])
                  }) %>%
  do.call(rbind.data.frame, .)

hyper.df$name1 <- ordered(hyper.df$name1,
                        levels = c("sigma2.1", "sigma2.2",
                                   "gamma"))

p.hyper <- ggplot(hyper.df) +
```




```

geom_line(aes(x = x, y = y)) +
geom_vline(data = hypers_lik, aes(xintercept = hypers), col = "red4") +
facet_wrap(~ name1, scales = "free") +
theme_bw() +
xlab(expression(theta)) +
ylab(expression(p(theta*'|'*y)))

#pdf("marginals_hyperpar.pdf", width = 6, height = 3)
print(p.hyper)

```

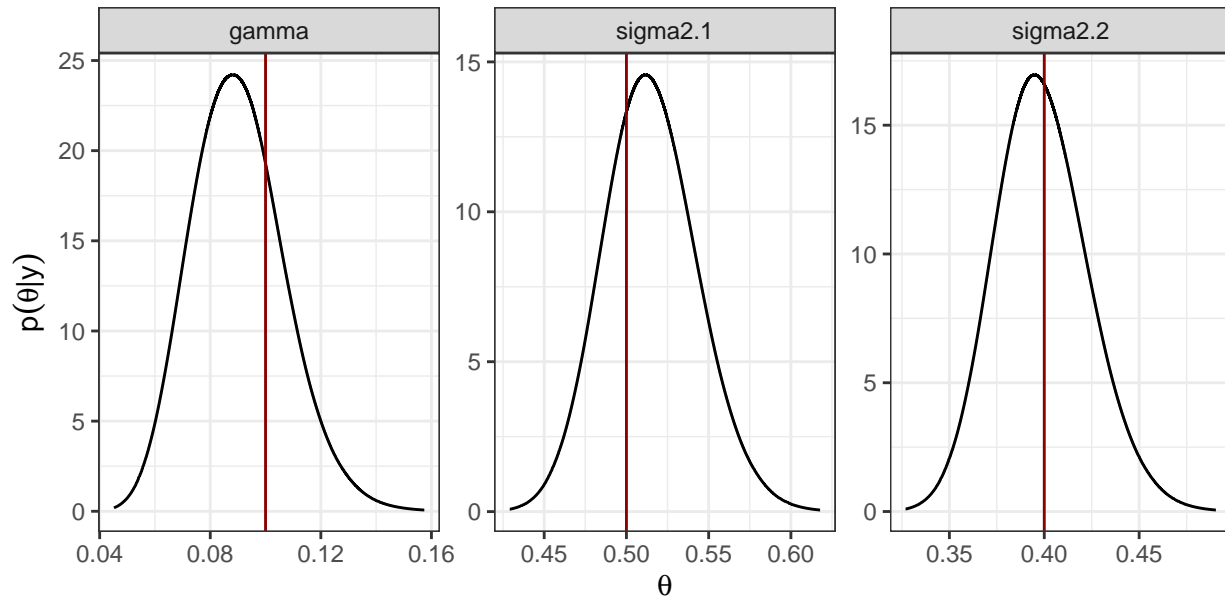

```

#dev.off()

```

## Predicting for a new observation

This section, is devoted to explain how to make predictions. We want to predict, for the values of the covariate  $x = -0.5, -0.2, 0.1, 0.4$ . In particular, we show how to compute the posterior predictive distribution for the mean of the *alr*-coordinates. Posteriorly, we move back to the Simplex.

### Preparing dataset for predictions

```

sim <- 1000
x.pred <- seq(-0.5, 0.5, 0.3)
n.pred <- length(x.pred)
cat("\n ----- \n")

##
## -----

cat("Creating the data.frame for predictions \n")

## Creating the data.frame for predictions
data_pred <- data.frame(intercept = 1,
                        x = rep(x.pred, D-1))
id.z.pred <- rep((N + 1):(N + n.pred), D - 1) #random effect z to model the correlation

```

```

# Category
id.cat_pred <- rep(1:(D - 1), rep(n.pred, D - 1))
#Index for covariates
variables_pred <- c("intercept", data_pred %>%
  dplyr::select(starts_with("x")) %>%
  colnames())
id.names_pred <- paste0("id.", variables_pred)
id.variables_pred <- rep(id.cat_pred, length(variables_pred)) %>%
  matrix(., ncol = length(variables_pred), byrow = FALSE)
colnames(id.variables_pred) <- id.names_pred

```

## Preparing inla.stack for predictions

```

stk.pred <- inla.stack(data = list(resp = matrix(NA, ncol = D - 1,
                                                nrow = n.pred*(D - 1))),
  A = list(1),
  effects = list(cbind(data_pred,
                        id.z = id.z.pred,
                        id.variables_pred)),
  tag = 'pred')
### --- Total stack
stk <- inla.stack(stk.est, stk.pred)

```

## Prediction

```

mod.pred <- inla(formula.typeII,
  family = rep("gaussian", D - 1),
  data = inla.stack.data(stk),
  control.compute = list(config = TRUE),
  control.predictor = list(A = inla.stack.A(stk), compute = TRUE, link = 1),
  control.mode = list(theta = model.typeII$mode$theta, restart = TRUE),
  control.family = list_prior,
  num.threads = 2,
  inla.mode = "experimental",
  verbose = FALSE)

```

## Extracting predictions using inla.posterior.sample

```

pred.values.mean <- mod.pred$summary.fitted.values$mean[inla.stack.index(stk, 'pred')$data] %>%
  matrix(., ncol = D - 1, byrow = FALSE)

post_sim_pred <- inla.posterior.sample(n = sim, result = mod.pred)
post_sim_predictor <- inla.posterior.sample.eval(fun = function(...){
  APredictor}, post_sim_pred, return.matrix = TRUE)
post_sim_idz <- inla.posterior.sample.eval(fun = function(...){
  id.z}, post_sim_pred, return.matrix = TRUE)

ind.pred <- inla.stack.index(stk, 'pred')$data
ind.idz <- inla.stack.index(stk, 'est')$data #This is the shared random effect
ind.idz <- ind.idz[1:(length(ind.idz)/(D - 1))]

post_sim_predictor[ind.pred, ] <- post_sim_predictor[ind.pred, ]-

```

```

kronecker(rep(1, D-1), post_sim_idz[-ind.idz,])

post_sim_pred_alr <- post_sim_predictor[ind.pred,]

#Computing mean and sd
pred_alr_summary <- t(apply(post_sim_pred_alr, 1, function(x){c(mean(x), sd(x))}))
pred_alr_summary <- data.frame(pred_alr_summary,
                               y.names = rep(names_y, rep(n.pred, D-1)),
                               x.pred = rep(x.pred, D-1))
colnames(pred_alr_summary)[1:2] <- c("mean", "sd")

pred_alr_summary

##           mean      sd y.names x.pred
## fun[2001] -2.542 0.0477 alry.1  -0.5
## fun[2002] -1.620 0.0281 alry.1  -0.2
## fun[2003] -0.697 0.0259 alry.1   0.1
## fun[2004]  0.226 0.0436 alry.1   0.4
## fun[2005] -3.466 0.0443 alry.2  -0.5
## fun[2006] -1.993 0.0250 alry.2  -0.2
## fun[2007] -0.521 0.0217 alry.2   0.1
## fun[2008]  0.952 0.0386 alry.2   0.4

```

### Predictions in the simplex

```

### Prediction in the simplex --- #####
apply(post_sim_predictor[ind.pred,], 2, function(x){
  alr_pred <- matrix(x, ncol = D - 1)
  pred_simplex <- compositions::alrInv(alr_pred)
  as.numeric(t(pred_simplex)) #Byrows
}) -> post_sim_pred_simplex

#Computing credible intervals
pred_simplex_summary <- t(apply(post_sim_pred_simplex, 1, function(x){c(mean(x), sd(x))}))
pred_simplex_summary <- data.frame(pred_simplex_summary,
                                   y.names = rep(c("y1", "y2", "y3"), n.pred),
                                   x.pred = rep(x.pred, rep(D, n.pred)))
colnames(pred_simplex_summary)[1:2] <- c("mean", "sd")

pred_simplex_summary

##      mean      sd y.names x.pred
## 1  0.0709 0.00313    y1  -0.5
## 2  0.0282 0.00120    y2  -0.5
## 3  0.9009 0.00342    y3  -0.5
## 4  0.1484 0.00355    y1  -0.2
## 5  0.1022 0.00230    y2  -0.2
## 6  0.7494 0.00379    y3  -0.2
## 7  0.2381 0.00479    y1   0.1
## 8  0.2840 0.00459    y2   0.1
## 9  0.4779 0.00433    y3   0.1
## 10 0.2589 0.00899    y1   0.4
## 11 0.5347 0.01029    y2   0.4
## 12 0.2064 0.00525    y3   0.4

```

## References

Martínez-Minaya, Joaquín, and Haavard Rue. 2023. “A Flexible Bayesian Tool for CoDa Mixed Models: Logistic-Normal Distribution with Dirichlet Covariance.” <https://arxiv.org/abs/2308.13928>.